









IP-D2 IP-SL1 page 7



IP-D1



IP-D3 page 8



IP-CS1



IP-CS3 page 11



IP-H1



IP-H3

page 12



IP-CR1



IP-CR3 page 15



IP-L1



IP-L3 page 16



IP-Group, Skallabackavägen 24, Halmstad, SWEDEN



IP-TC1 IP-TC3 page 21





PALLET LIDS page 22



IP-CC1 page 25



IP-CB1



IP-CB3 page 28



IP-CB3 High page 31



IP-SB3 page 32



READY MORTAR SKIP page 35



FISH BOXES page 36

IP-CR2 IP-D2

800 x 600 x 160 **7.5kg** 3 runners

800 x 600 x 160 **7.5kg** 3 runners

- Half pallet
- · Versatile applications
- · Heavy loads
- Highly resistant
- Recyclable

Static load 2000kg Dynamic load 500kg With 7mm rims Individual labelling



OPTIONS / IP-CR2 / IP-D2 MODELS

Rims: 22mm Anti-slip plugs for D2 Lids available (see page 22)













IP-D2 with 22mm rims >






IP-SL1

1200 x 800 x 120 **7.5kg** 3 runners

- Intermediate pallet
- · Ultra-lightweight
- · Ideal for order picking
- · Reverse logistics optimisation
- Carbon footprint reduction
- Recyclable

Static load 2000kg Dynamic load 500kg Corner lugs for anchoring shrink wrap film With or without 7mm rims Individual labelling



IP-SL1

OPTIONS / IP-SL1 MODEL

Outside rims: 12mm







IP-D1 IP-D3

1200 x 800 x 150 **12kg** 3 runners 1200 x 1000 x 150 **14kg**

3 or 5 runners (D3-5)

- · One-piece moulding
- Load capacity up to 1250kg in a racking system
- Without or with 2 to 6 metal profiles, depending on the load
- · Highly resistant*
- Up to 250 trips
- Recyclable

Static load 5000kg Dynamic load 1000kg With 7mm rims Individual labelling

* Damage rate < 1%





IP-D1

IP-D3

OPTIONS / IP-D1 / IP-D3 MODELS

Outside rims: 22mm Anti-slip plugs











IP-CS1 IP-CS3

1200 x 800 x 150 **12.5kg** 3 runners

1200 x 1000 x 150 **14kg** 3 runners

- Versatile pallet
- · One-piece moulding
- Load capacity up to 1400kg in a racking system
- Without or with 2-6 metal reinforcement profiles, depending on the load
- Opened or closed runners
- Recyclable

Static load 5000kg Dynamic load from 1000 to 1500kg With 7mm rims Individual labelling





IP-CS1

IP-CS3

OPTIONS / MODELS IP-CS1 / IP-CS3


Rims: 22mm

Palgrip® anti-slip runners









IP-H1 IP-H3

1200 x 800 x 160 **18kg** 3 runners 1200 x 1000 x 160 **21,5kg** 3 runners

- Open pool pallet (H1)
- Hygienic
- Welded runners
- · Easy to clean
- · Heavy duty loads
- Recyclable

Static load 5000kg Dynamic load up to 1250kg Load capacity up to 1000kg in a racking system With 7mm rims Individual labelling

*EURO IP-H1 version With central box retainers, GS1 certified









IP-H3

OPTIONS / IP-H1 / IP-H3 MODELS

Palgrip® anti-slip runners Other colours on request











IP-CR1 IP-CR3

1200 x 800 x 160 19kg 3 runners

1200 x 1000 x 160 25.5kg 3 or 5 runners (TC3-5)

- Ultra-resistant
- Heavy loads up to 1400kg in a racking system
- CR1: 3 steel profiles / CR3: 5 steel profiles
- · Non-visible metal profiles (underneath anti-slip strips)
- Palgrip[®] anti-slip strips on the top deck
- Up to 250 trips
- Recyclable

Static load 7500kg Dynamic load up to 1500kg Load capacity up to 1400kg in a racking system CR1 without rims CR3 with 5 mm rims Individual labelling



IP-CR1

IP-CR3

OPTIONS / IP-CR1 / IP-CR3 MODELS

Without or with rims up to 22mm







IP-L1®

IP-L3®

1200 x 800 x 150 **20kg** 3 runners 1200 x 1000 x 160 **26kg**

3 runners

- Unique
- Dimensions identical to wooden pallet
- Heavy duty loads (5 reinforcement profiles)
- · Rack load 1500kg
- Ultra-resistant
- Palgrip® anti-slip top deck and runners
- Ideal for automation
- Recyclable

Static load 7500kg Dynamic load up to 1500kg Rack load capacity up to 1500kg Without or with 5 mm rims Individual labelling

Non-visible steel profiles








IP-L3®

OPTIONS / IP-L1® / IP-L3® MODELS











IP-TC1 IP-TC3

1200 x 800 x 160 **18kg** 3 runners

1200 x 1000 x 160 21.5kg 3 or 5 runners (TC3-5)

- Smooth, easy to clean
- Hygienic
- Completely closed, no risk of contamination
- Heavy duty loads up to 2000kg in a racking system
- Recyclable

Available in light grey light blue, white, basalt grey and black Static load 7500kg Static load 1500kg With 7mm rims Individual labelling

IÅ-TC1 TIP-C3

OPTIONS / IP-TC1 / IP-TC3 MODELS

Reinforcement profiles: 3 to 5 / rack load 2000kg Rims: without or with 22mm rims Palgrip® anti-slip top deck (suitable for food contact)















PALLET

800 x 600 2.3kg

1200 x 800 5.5kg

1200 x 1000 6.85kg

- · Compatible with all pallets
- Universal lids
- · Secures the transport unit
- Protects the goods
- · Reinforced corners
- Recyclables

Individual labelling



PALLET LID 800 X 600



PALLET LID 1200 X 800



PALLET LID 1200 X 1000

OPTIONS















IP-CC1

1220 x 815 x 300 **7.8kg/ 260** litres

- Pallet collar foldable
- Flexibility in palletising
- Adaptable
- Stackable 2 on 1
- Compatible with plastic and wooden pallets
- Ergonomic folding mechanism, easy to handle
- · Hassle-free palletising
- Recyclable

Stacking weight 500kg Without or with 10mm rims Individual labelling





IP-CC1 COLLAR

OPTIONS

Other colours on request







Unfolding the IP-CC1 Collar >

PALGRIP®

To support customers in optimising their logistics processes, we have developed the Palgrip® anti-slip coating and equipped some of the pallets from their own range with the unique solution – on the top deck and or under the runners. Palgrip® pallets are available as standard or tailored to customer needs.

Thanks to the excellent slip resistance of Palgrip® pallets, a high level of load security is guaranteed in all logistics processes, whether up in high racks, on turntables, on roller or chain conveyors. Even in an inclined position, the load remains safely on the pallet.





IP-TC Palgrip®





QUALITY TESTING PROCEDURES

All our plastic pallets are tested in our fully equipped test laboratory, in order to ensure that our customers receive high quality only. The pallets are tested according to ISO 8611 and the following internal control criteria:

- · General appearance, quality of manufacture
- · Weight and main dimensions
- Corner Drop Test :
 - Drop tests from various heights up to 4 m at +25°C, +40°C and -20°C
- Roller conveyor test with a load of 1000kg over a distance of 60 km
- Forklift test (impact test)
- Ball drop test at -20°C, with a weight of 5kg dropped from a height of 1.5 m
- Dimensional stability during change of temperature
- · Wetting agent bath for ageing simulation and for testing the quality of the PE
- Internal pressure test
- Bond strength test of runners/feet:
 Lifting the runners with the forks of a pallet truck at room temperature and at -20°C
- Deflection test: duration 48 and or 100 hours







INDIVIDUALITY AS NEW STANDARD

TAILOR-MADE PLASTIC PALLETS

Today, smooth processes need maximum flexibility. Our answer: high quality plastic pallets in various special sizes. We would be happy to provide you with a custom-fit solution to your individual requirements – fast and in first-class quality


The butt welding process enables us to produce numerous special designs in premium qualitysuch as the following:

- Extensions on one side (length or width)
- · Enlargement on both sides, symmetrical (length or width)
- · Reduction on one or both sides, symmetrical (length or width)
- · Additional rims and edges

Individual pallet size up to 3000 x 3000mm





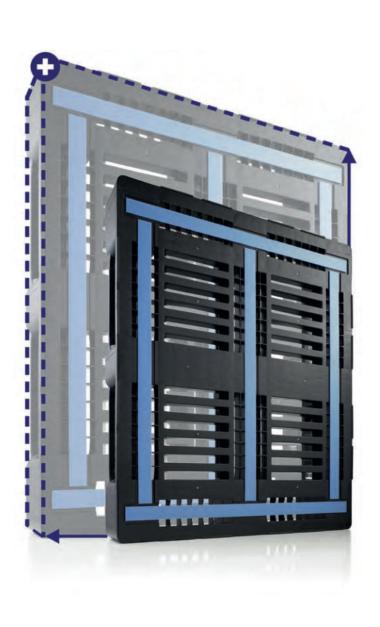



OUR VALUES, OUR COMPETENCES

Customer satisfaction

Making pallets is our business but adding value to your supply chain is our goal. We put all our skills at your service in a relationship of trust that is essential for a long-term partnership.

Environmental commitment

Our pallets are 100% recyclable. We takes back your pallets at the end of their life and manufactures its own compound. The load bearing capacities of pallets made from compound are identical to those made of virgin material.









IP-Group, Skallabackavägen 24, SWEDEN

QUALTIY YOU CAN RELY ON

A wide variety of industries put their trust in the quality and reliability of IPG pallets, boxes and containers. Among these are food, retail & wholesale, automotive, construction, pharmaceutical, chemical and clean room industries.

CONTACT

IP-Group

Tel: +46 35 102480 info@ip-group.com

IP-Group Skallabackavägen 24 302 41 Halmstad, SWEDEN

www.ip-group.se