


PALLET CONTAINER SYST -1210KL 1200X1000X990

THE SMART PALLET CONTAINER



SYST-1210KL-1200X1000X990

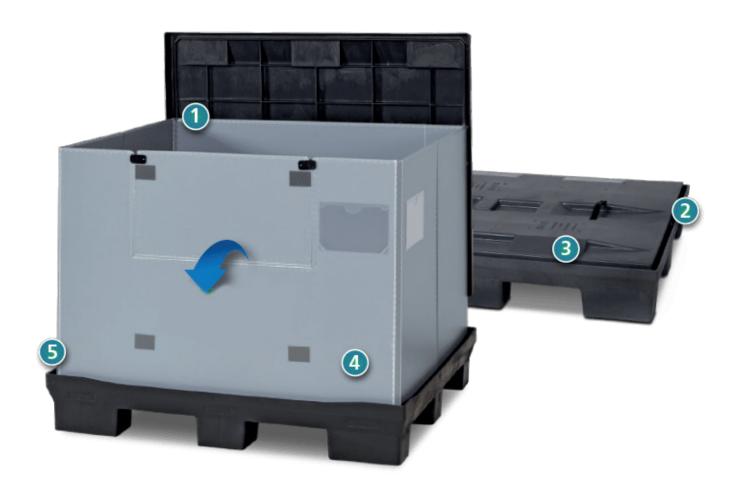

Hang in lid

- Space saving on site
- Plus in terms of ergonomics and handling

Lid

- 2 Handles (Black)
- Suspension lugs
- Control Opening







Safe stacking

- No tying necesary
- Fast and safe stacking of the full and empty container



Secure empty unit

- Protection of the folded sleeve
- No damage to the containers by slipping
- Safe and stable stacking



Sleeve M fold

- 2 document holder
- Loading door with locking

SYST-1210KL-1200X1000X990

Empty: 364

TECHNICAL DATA

External dimensions: 1200x1000x990 mmInternal dimensions: 1140x940x815 mm

Volume: 873 LTare weight. 39 kg


Empties height: 205 mm in a stackFodling system: Sandwich folding

• High rack (without base): No

LOADS:

Payload max: 250 kg
Stacking load (max): 1 250 kg
Stacking factor: 1+5

CAPACITY UTILISATION - MEGA TRAILER Full: 78



LOGISTICAL AND TRANSPORT:


Return rate: 4.7Volume reduction: 79 %








SANDWICH	PALLET	SLEEVE	LID
Material	PE	PP	PE
Grammage	-	3000 g/m ²	-
Equipment further options available	Open surface 9 feet 4 way entry pallet drainage holes	M-folding 1 flap door 600x350 mm 2 label holders A5	2 handles black control opening suspension lugs







1:4,7 PROPORTIONALLY STACKABLE



IPG RETURN PACKAGING CONCEPT AN ECONOMY INSPIRED BY THE CYCLUS OF NATURE







WWW.IP-GROUP.NO WWW.IP-GROUP.SE



